# RIVERSIDE COMMUNITY CLINIC

CONSTRUCTION DOCUMENTS - SYNTHETIC SAMPLE SET (FICTIONAL PROJECT, NOT FOR CONSTRUCTION)

## SHEET INDEX


| SHEET | SHEET TITLE |
|---|---|
| G-001 | COVER SHEET AND SHEET INDEX |
| A-101 | FIRST FLOOR PLAN |
| A-601 | DOOR SCHEDULE AND DOOR TYPES |
| M-101 | MECHANICAL FLOOR PLAN |
| M-601 | MECHANICAL EQUIPMENT SCHEDULE |
| E-601 | ELECTRICAL PANEL SCHEDULES |


## ABBREVIATIONS

AFF  ABOVE FINISHED FLOOR
EQ  EQUAL
HM  HOLLOW METAL
NIC  NOT IN CONTRACT
SIM  SIMILAR
TYP  TYPICAL
WD  WOOD
MCA  MINIMUM CIRCUIT AMPACITY
V/PH  VOLTS / PHASE

## GENERAL NOTES

1. ALL DOCUMENTS IN THIS SET ARE SYNTHETIC AND FOR SOFTWARE DEMONSTRATION ONLY.
2. DIMENSIONS GOVERN. DO NOT SCALE DRAWINGS.
3. REFER TO THE PROJECT MANUAL FOR SPECIFICATIONS.

**NORTHWIND DESIGN STUDIO**

SYNTHETIC SAMPLE - NOT FOR CONSTRUCTION

PROJECT:

**RIVERSIDE COMMUNITY CLINIC**

PROJECT NO.: 2026-014

**REVISIONS**

| REV | DATE | DESCRIPTION |
|---|---|---|
| A | 2026-08-14 | ISSUED FOR BID |

SHEET TITLE:

**COVER SHEET AND SHEET INDEX**

SCALE:


AS NOTED

SHEET NO.

**G-001**

**GENERAL NOTES:**

1. DIMENSIONS ARE TO GRID LINES UNLESS NOTED OTHERWISE. DO NOT SCALE DRAWINGS.
2. SEE A-601 FOR DOOR SCHEDULE AND DOOR TYPES. DOOR TAGS SHOW DOOR NUMBER.

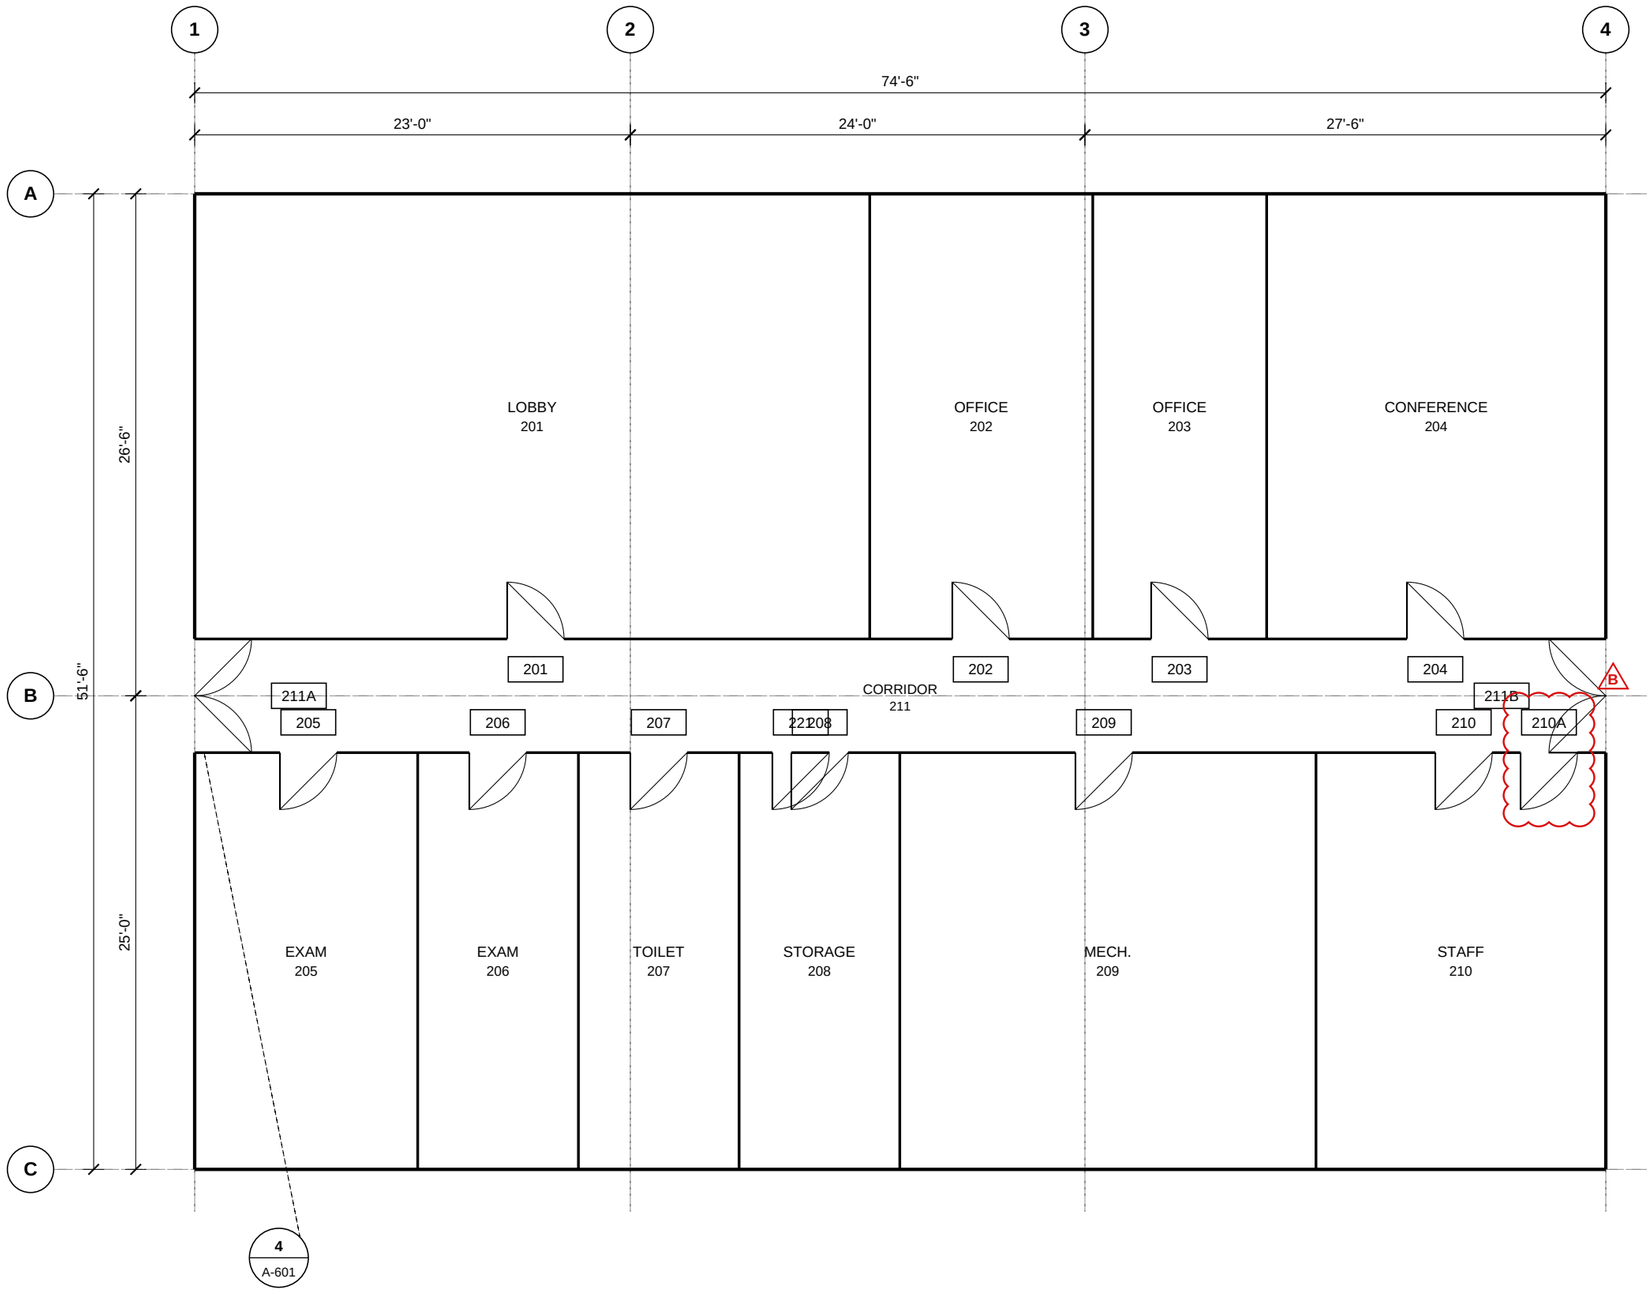


**1 FIRST FLOOR PLAN** SCALE: 1/8" = 1'-0"

**NORTHWIND DESIGN STUDIO**

SYNTHETIC SAMPLE - NOT FOR CONSTRUCTION

PROJECT:

**RIVERSIDE COMMUNITY CLINIC**

PROJECT NO.: 2026-014

**REVISIONS**

| REV | DATE | DESCRIPTION |
|---|---|---|
| A | 2026-08-14 | ISSUED FOR BID |
| B | 2026-09-18 | ADDENDUM 1 |

SHEET TITLE:

**FIRST FLOOR PLAN**

SCALE:

1/8" = 1'-0"

SHEET NO.


# A-101

## DOOR SCHEDULE


| MARK | TYPE | WIDTH | HEIGHT | MATERIAL | FRAME | FIRE RATING | HDW SET | SPEC SECTION | REMARKS |
|---|---|---|---|---|---|---|---|---|---|
| 201 | D1 | 3'-0" | 7'-0" | WD | HM | - | HW-1 | 08 14 16 | |
| 202 | D1 | 3'-0" | 7'-0" | WD | HM | 20 MIN | HW-1 | 08 14 16 | |
| 203 | D1 | 3'-0" | 7'-0" | WD | HM | - | HW-1 | 08 14 16 | |
| 204 | D1 | 3'-0" | 7'-0" | WD | HM | 20 MIN | HW-1 | 08 14 16 | |
| 205 | D1 | 3'-0" | 7'-0" | WD | HM | 90 MIN | HW-1 | 08 14 16 | |
| 206 | D1 | 3'-0" | 7'-0" | WD | HM | 20 MIN | HW-1 | 08 14 16 | |
| 207 | D2 | 3'-0" | 7'-0" | HM | HM | - | HW-3 | 08 11 13 | |
| 208 | D2 | 3'-0" | 7'-0" | HM | HM | 45 MIN | HW-2 | 08 11 13 | |
| 209 | D2 | 3'-0" | 7'-0" | HM | HM | 60 MIN | HW-2 | 08 11 13 | |
| 210 | D1 | 3'-0" | 7'-0" | WD | HM | 20 MIN | HW-1 | 08 14 16 | |
| 210A | D1 | 3'-0" | 7'-0" | WD | HM | 20 MIN | HW-1 | 08 14 16 | |
| 211A | D3 | 6'-0" | 7'-0" | ALUM | ALUM | - | HW-4 | 08 41 13 | |
| 211B | D3 | 6'-0" | 7'-0" | ALUM | ALUM | - | HW-4 | 08 41 13 | |

B


## 4 DOOR TYPES



**D1 - FLUSH WOOD, SOLID CORE**
SEE SECTION 08 14 16



**D2 - HOLLOW METAL, FLUSH**
SEE SECTION 08 11 13



**D3 - ALUM. STOREFRONT PAIR**
SEE SECTION 08 41 13

**NOTES:**
1. HARDWARE SETS PER SECTION 08 71 00.
2. - IN FIRE RATING COLUMN = NON-RATED OPENING.


**NORTHWIND DESIGN STUDIO**
SYNTHETIC SAMPLE - NOT FOR CONSTRUCTION


PROJECT:
**RIVERSIDE COMMUNITY CLINIC**
PROJECT NO.: 2026-014

**REVISIONS**

| REV | DATE | DESCRIPTION |
|---|---|---|
| A | 2026-08-14 | ISSUED FOR BID |
| B | 2026-09-18 | ADDENDUM 1 |


SHEET TITLE:
**DOOR SCHEDULE AND DOOR TYPES**

SCALE:
AS NOTED

SHEET NO.
**A-601**

**GENERAL NOTES:**

1. RTU SUPPORT FRAMES ARE DESIGNED FOR THE MAX OPERATING WEIGHTS NOTED. COORDINATE WITH M-601.
2. DO NOT SCALE DRAWINGS.

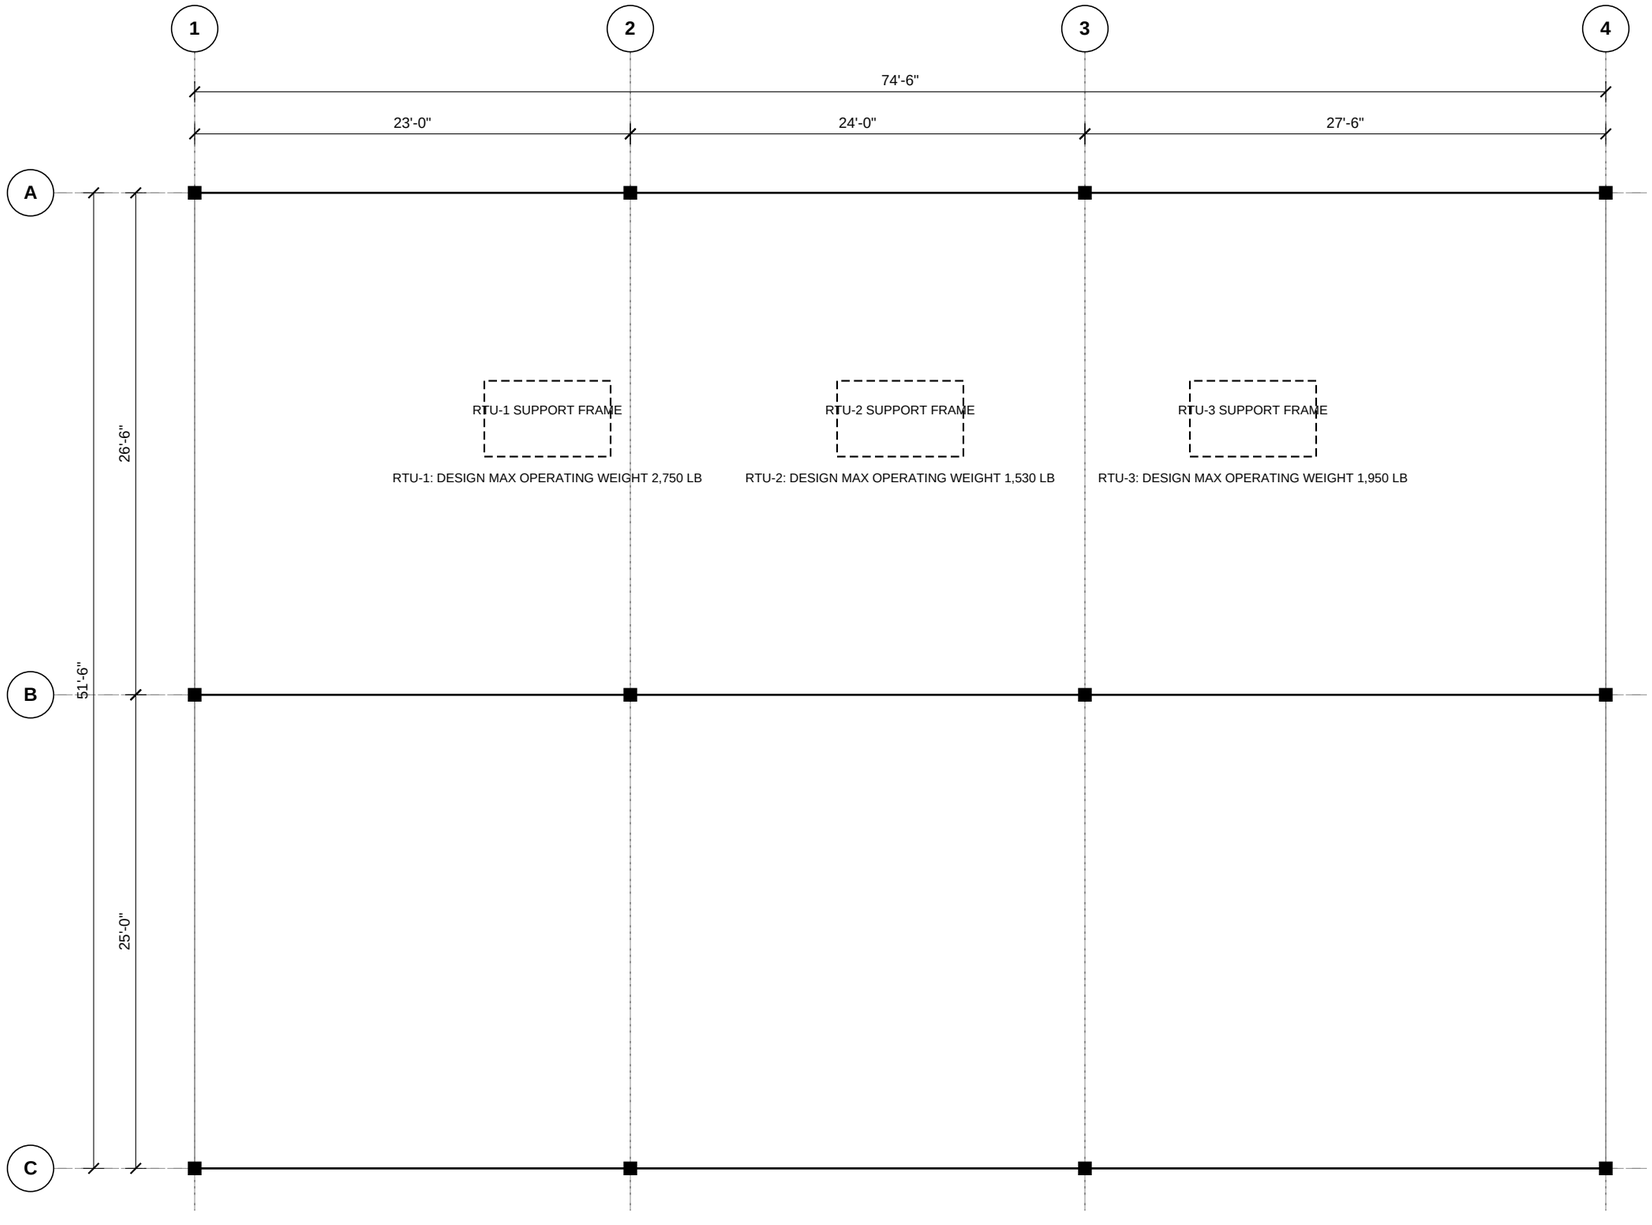


**1 ROOF FRAMING PLAN** SCALE: 1/8" = 1'-0"

**NORTHWIND DESIGN STUDIO**

SYNTHETIC SAMPLE - NOT FOR CONSTRUCTION

PROJECT:

**RIVERSIDE COMMUNITY CLINIC**

PROJECT NO.: 2026-014

**REVISIONS**

| REV | DATE | DESCRIPTION |
|---|---|---|
| A | 2026-08-14 | ISSUED FOR BID |

SHEET TITLE:

**ROOF FRAMING PLAN**

SCALE:


1/8" = 1'-0"

SHEET NO.

**S-101**

**GENERAL NOTES:**

1. RTUs ARE ROOF-MOUNTED ABOVE; SEE S-101 FOR SUPPORT FRAMING AND M-601 FOR SCHEDULE.
2. EQUIPMENT MARKED (NIC) IS FURNISHED AND INSTALLED BY OWNER.

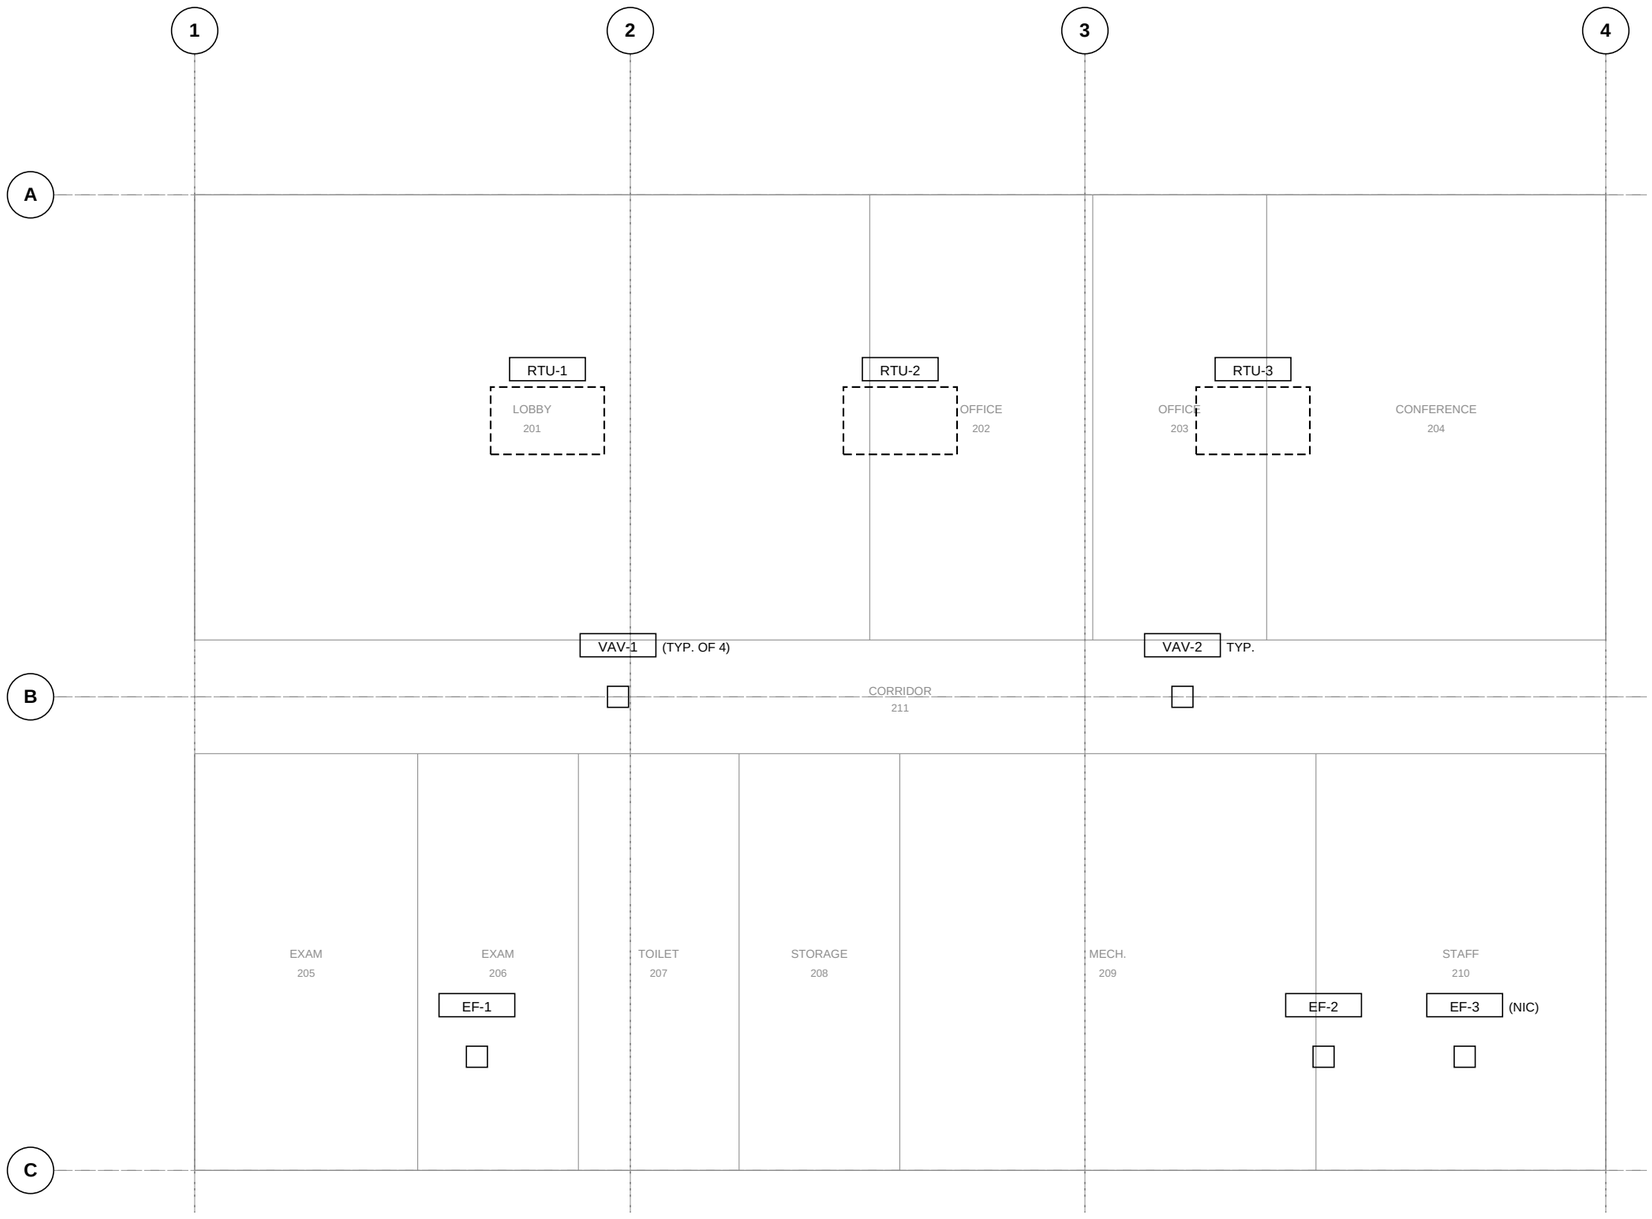


**1 MECHANICAL FLOOR PLAN** SCALE: 1/8" = 1'-0"

**NORTHWIND DESIGN STUDIO**

SYNTHETIC SAMPLE - NOT FOR CONSTRUCTION

PROJECT:

**RIVERSIDE COMMUNITY CLINIC**

PROJECT NO.: 2026-014

**REVISIONS**

| REV | DATE | DESCRIPTION |
|---|---|---|
| A | 2026-08-14 | ISSUED FOR BID |

SHEET TITLE:

**MECHANICAL FLOOR PLAN**

SCALE:

1/8" = 1'-0"

SHEET NO.

**M-101**

## MECHANICAL EQUIPMENT SCHEDULE

| TAG | DESCRIPTION | QTY | CAPACITY | VOLTS | MCA (A) | WEIGHT (LB) | SPEC | REMARKS |
|---|---|---|---|---|---|---|---|---|
| RTU-1 | ROOFTOP UNIT, GAS/ELEC | 1 | 12.5 TON | 460/3 | 45 | 2,450 | 23 74 13 | R-454B, ECONOMIZER |
| RTU-2 | ROOFTOP UNIT, GAS/ELEC | 1 | 7.5 TON | 460/3 | 35 | 1,980 | 23 74 13 | R-454B, ECONOMIZER |
| RTU-3 | ROOFTOP UNIT, GAS/ELEC | 1 | 6 TON | 460/3 | 30 | 1,650 | 23 74 13 | R-410A, ECONOMIZER |
| EF-1 | EXHAUST FAN, CEILING | 1 | 300 CFM | 120/1 | - | 45 | 23 34 16 | |
| EF-2 | EXHAUST FAN, CEILING | 1 | 500 CFM | 120/1 | - | 100 | 23 34 16 | |
| EF-3 | KITCHEN HOOD FAN | 1 | 250 CFM | 120/1 | - | 40 | 23 34 16 | NIC - BY OWNER |
| VAV-1 | VAV TERMINAL, 8 IN. | 4 | 450 CFM | - | - | 35 | 23 36 00 | |
| VAV-2 | VAV TERMINAL, 6 IN. | 3 | 250 CFM | - | - | 30 | 23 36 00 | |

**NOTES:**

1. ELECTRICAL CHARACTERISTICS SHALL BE COORDINATED WITH E-601 PRIOR TO ORDERING.
2. RTU OPERATING WEIGHTS SHALL NOT EXCEED STRUCTURAL DESIGN WEIGHTS ON S-101.

**NORTHWIND DESIGN STUDIO**

SYNTHETIC SAMPLE - NOT FOR CONSTRUCTION

PROJECT:

**RIVERSIDE COMMUNITY CLINIC**

PROJECT NO.: 2026-014

**REVISIONS**

| REV | DATE | DESCRIPTION |
|---|---|---|
| A | 2026-08-14 | ISSUED FOR BID |

SHEET TITLE:

**MECHANICAL EQUIPMENT SCHEDULE**

SCALE:

AS NOTED

SHEET NO.

**M-601**

PANEL HA: 480Y/277V, 3PH, 4W  PANEL LA: 208Y/120V, 3PH, 4W

## PANEL SCHEDULES (BRANCH CIRCUITS)

| PANEL | CKT | LOAD | V/PH | POLES | BKR (A) |
|---|---|---|---|---|---|
| HA | 1,3,5 | RTU-1 | 460/3 | 3 | 55 |
| HA | 7,9,11 | RTU-2 | 460/3 | 3 | 45 |
| HA | 13,15,17 | RTU-3 | 460/3 | 3 | 40 |
| LA | 1 | EF-1 | 120/1 | 1 | 20 |
| LA | 5 | EF-3 | 120/1 | 1 | 20 |
| LA | 13 | LIGHTING - CORRIDOR | 120/1 | 1 | 20 |
| LA | 15 | RECEPTACLES - OFFICES | 120/1 | 1 | 20 |

**NORTHWIND DESIGN STUDIO**

SYNTHETIC SAMPLE - NOT FOR CONSTRUCTION

PROJECT:

**RIVERSIDE COMMUNITY CLINIC**

PROJECT NO.: 2026-014

**REVISIONS**

| REV | DATE | DESCRIPTION |
|---|---|---|
| A | 2026-08-14 | ISSUED FOR BID |

SHEET TITLE:

**ELECTRICAL PANEL SCHEDULES**

SCALE:

AS NOTED

SHEET NO.

**E-601**